


Mass Elastic System

Cummins 4B/BT/BTA3.9-G

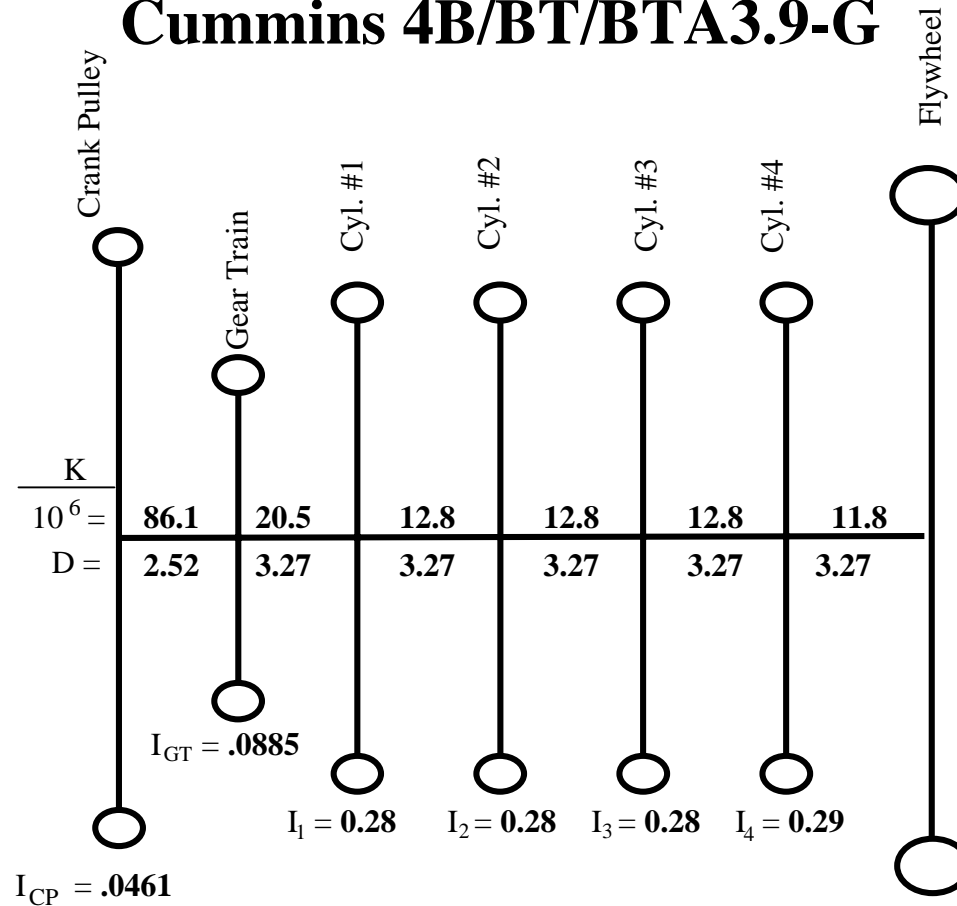

I = Mass Moment of Inertia (in-lb-sec²)
 K = Stiffness (in-lb/radian)
 D = Minimum Shaft Diameter (inches)

SAE 2: FW 9016: $I_{FW} = 11.07$
 SAE 3: FW 9017: $I_{FW} = 4.96$
 SAE 3: FW 9134: $I_{FW} = 10.30$
 SAE 3: FW 9420: $I_{FW} = 6.61$