



Engine Specifications:

(((Revised Firing Order)))

Engine Model KTA50-G3, G4, G5, G6, G7, G8, G9
Type 4 Cycle Diesel
No. of Cylinders 16
Bore of Cylinders 159 mm (6.25 in.)
Stroke 159 mm (6.25 in.)
Reciprocating wt/cyl 9.07 kg (20 Lbs)
Connecting Rod Length 289.6 mm (11.4 in.)

Cylinder Arrangement

Crankshaft Arrangement

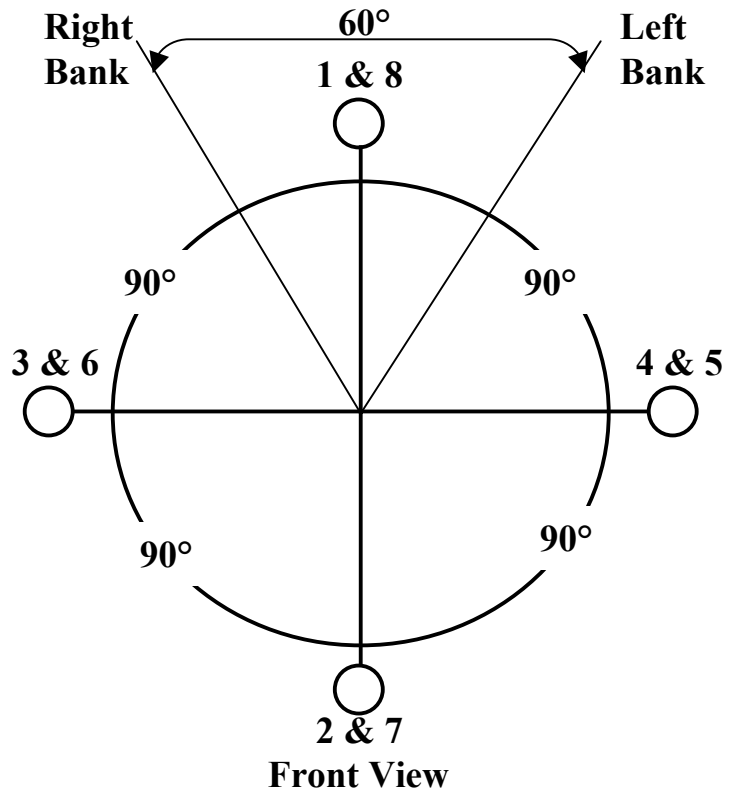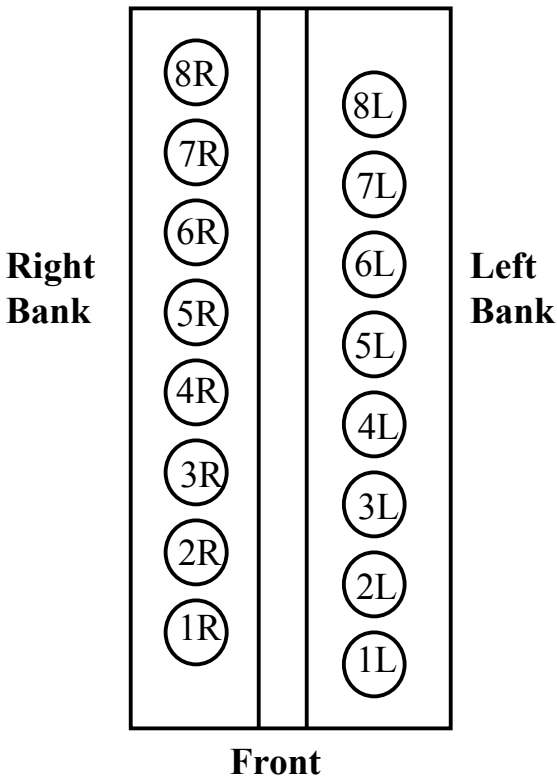

Firing Order:

Right Hand Engine Rotation

1R-1L-3R-3L-2R-2L-5R-4L-8R-8L-6R-6L-7R-7L-4R-5L

Crank Interval between Successive Firing

60°-30°-60°-30°-60°-30°-60°-30°-60°-30°-60°-30°-60°-30°-60°-30°